



# STRETCHED

Create impressive space for all target audience

# Maximize space and optimize content

Stretched displays, with 16:4.5 wide screen stretched display offer the ability to effectively communicate information in small, narrow spaces such as store shelves, ceilings, and corridors. Stretched displays are an invaluable asset in keeping travelers apprised of changing schedules providing clear, easy to read, vibrant information that can be consumed at a glance.



Stretch Displays



Manage Contents



Ultra Wide  
Viewing Angle



High Brightness



Non-Glare Panels



Pivot Mode




IP65  
Protection Standard



24/7 Working

# Maximize viewer engagement in a minimum amount of space

Featuring brightness levels of up to 700 nit, these displays deliver the clearest, richest images regardless of lighting conditions. With a non-glare panel, you can rest assured that your content will not be obstructed by lighting conditions outside of your control, and you can be confident that your content will look great anywhere.

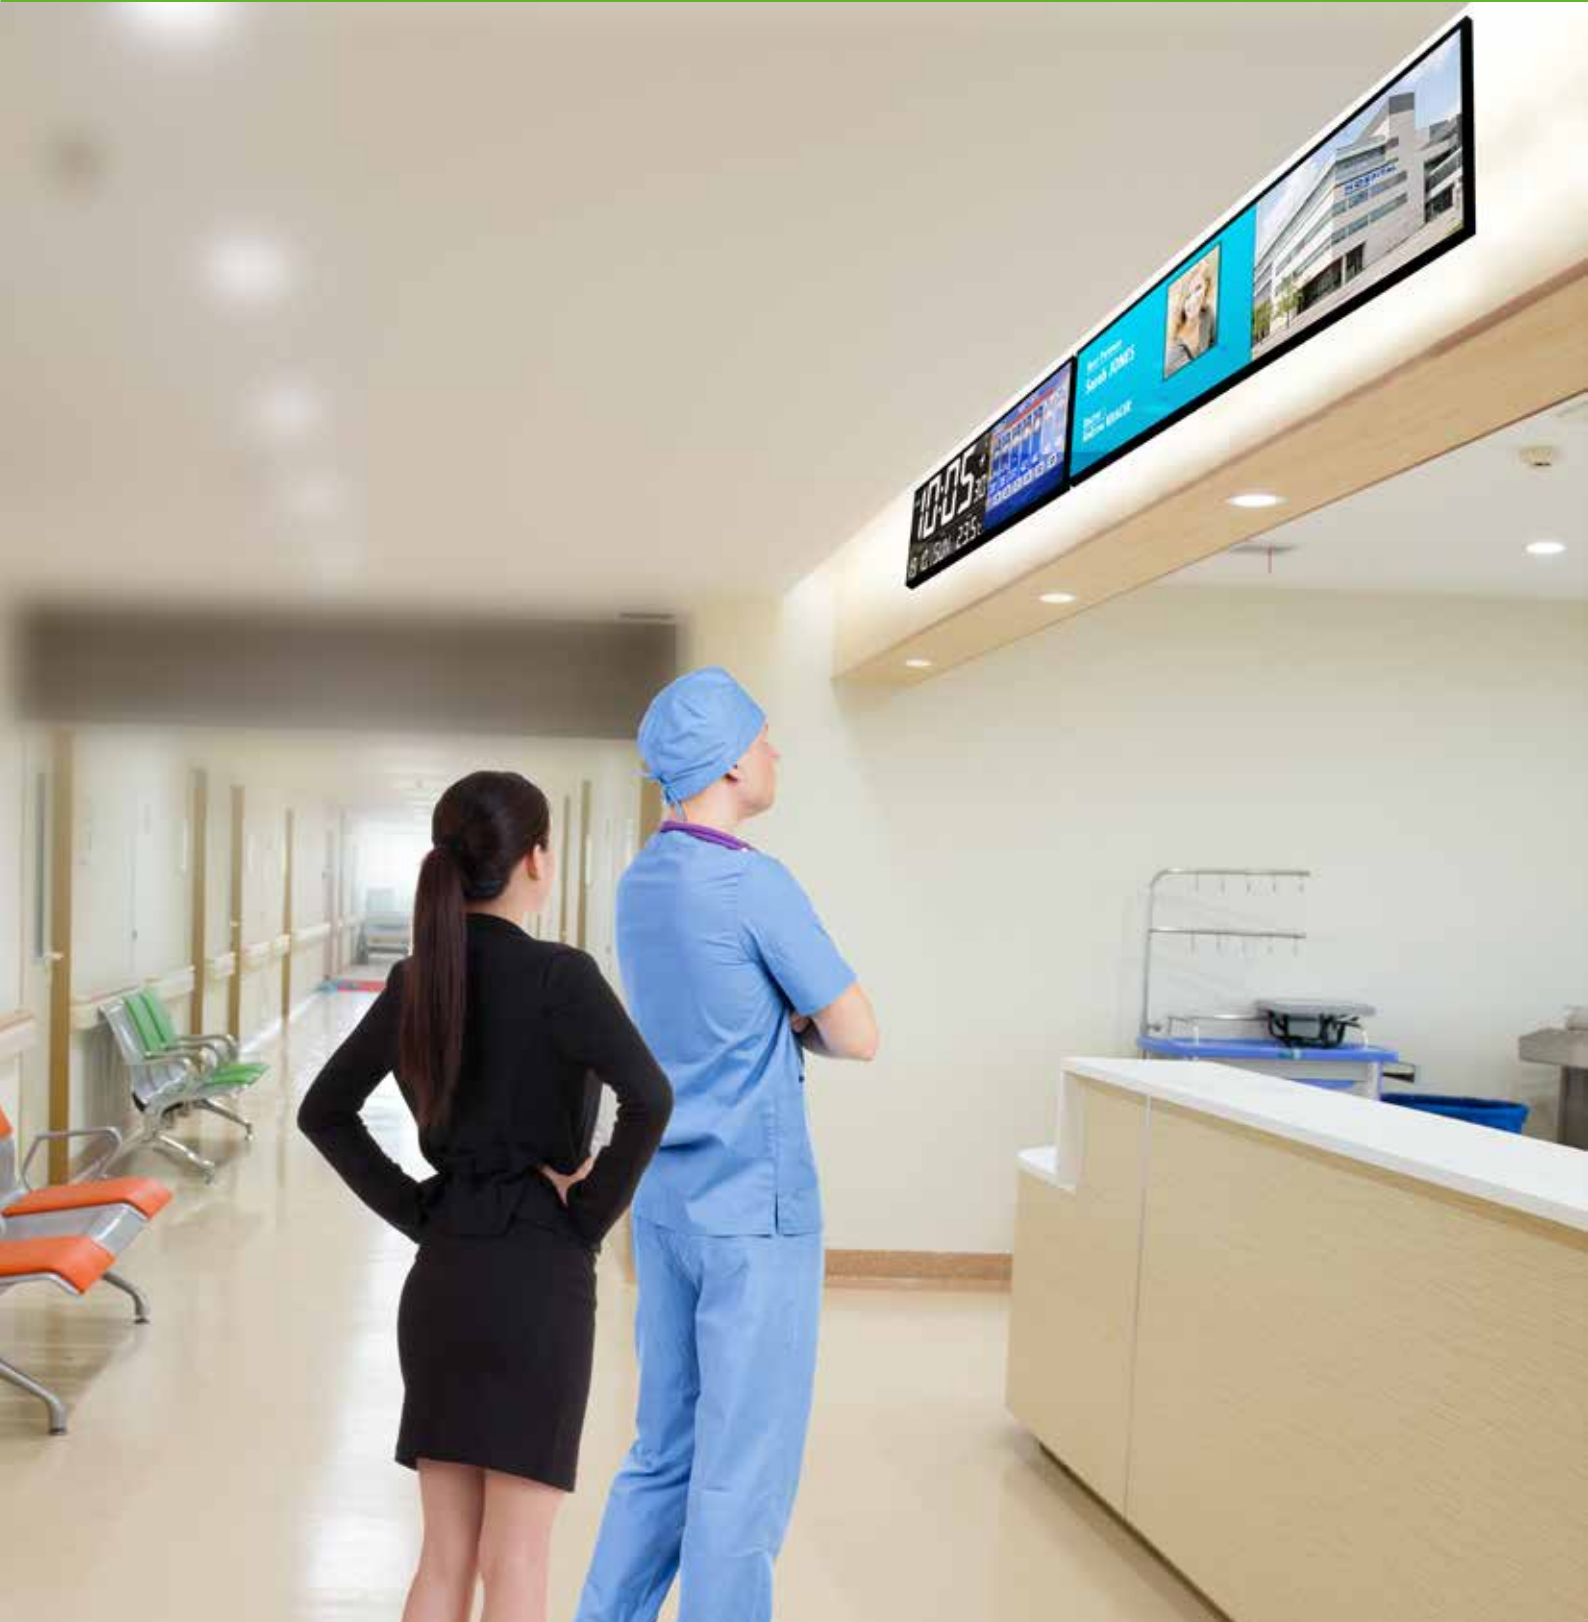

### Branding and Color Applications

Manage and control digital signage content without the need for optional external devices. You can effectively and efficiently coordinate your business' signage.

### Strong Integration Technology

The integrated Android and Windows Media Player allows for super fast updates. If required you can also run third party Digital Signage software via any PC boards.

### Clear Visibility with Anti-Reflective Glass

Your promotions and information are sure to captivate viewers with high brightness and crystal clear image quality. Viewing is maximized by eliminating factors that can interrupt visibility from light reflection, and reducing glare.

### Long Life Industrial Display

The displays offer durable and extended 24/7 usage to ensure that your business messages are conveyed whenever and wherever they are most impactful.



### Readability In Any Environment

Led backlighting technology improves readability and less power consumption. In addition commonly used conventional CCFL lamps offer longer life.

### Special Aluminum Body

The product have a durable aluminum cabin design . By this means, beside its stunning visuality, product is protected from all possible environmental and individual risks.

### Protection Glass

It is manufactured from glass that is reinforced by chemical processes and is resistant to very high piercing. Provides additional protection against physical impact during use.ather resistant.

### Versatile Connectivity and Control

A range of connectivity options to power and control your signage content include, USB 2.0, HDMI, an SD Card slot, RJ45 and RS232C an optional Power over Ethernet (PoE).

PANEL	SH275-HA	SH280-HA	SH370-HA	SH420-HA	SH860-HA
Panel Size	27,5"	28"	37"	42"	86"
Panel Type	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1366 x 70 (16:1)	1920 x 357 (16:3)	1920 x 540 (16:4,5)	1920 x 268 (16:2,2)	3840 x 600
Brightness (Typ.)	1000 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>
Contrast	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1100:1 (Typ.) (TM)
Viewing Angle (H x V)	178° x 178°	178° x 178°	178° x 178°	178° x 178°	178° x 178°
Response Time (G-to-G)	12 ms (G to G)	12 ms (G to G)	12 ms (G to G)	12 ms (G to G)	8 ms (G to G)
Color	16,7 Million	16,7 Million	16,7 Million	16,7 Million	16,7 Million
Active Display Area	697,7(H) x 35,7(V)	698,4(H)x129,8(V)	919,30(H) x 258,5(V)	1095,84(H) x 153v(V)	
Applications	Horizontal / Vertical	Horizontal / Vertical	Horizontal / Vertical	Horizontal / Vertical	Horizontal / Vertical

### PANEL CONNECTIVITY

Video Input	DVI	VGA, HDMI,DVI	VGA, HDMI,DVI	VGA, HDMI,DVI	HDMI, DP, OPS, DVI-D, USB 2.0, USB 3.0, SD-CARD
Video Output	N/A	N/A	N/A	N/A	N/A
Audio Input	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
Audio Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack

### POWER

Power Requirement	AC 100-240 V~(+/- 10 %),50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	11 W/h	26 W/h	32 W/h	32 W/h	180 W/h
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W	<0,5W

### DIMENSIONS

Product Size(mm) (w x h x d)	719,5 x 67,1 x 19,4	735,4 x 170,5 x 18	960 x 302,4 x 15,8	1121,7 x 184,8 x 21,6	2159 x 347,98 x 81,28
Package Size (mm)	799,5 x 75,1 x 29,4	835,4 x 195,5 x 28	1020 x 352,4 x 19,8	1821,7 x 284,8 x 29,6	2291 x 228,6 x 480,6
Product Weight(kg)	0,9 Kg	3 Kg	5 Kg	5 Kg	20,5 Kg
Package Weight(kg)	1,5 Kg	4 Kg	6 Kg	5,5 Kg	35,38 Kg

### OPERATION

Working Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Working Temp.:0~ 50 °C ; Storage Temp.:20~60 °C	Working Temp.:0~ 50 °C ; Storage Temp.:20~60 °C	Working Temp.:0~ 50 °C ; Storage Temp.:20~60 °C	Working Temp.:0~ 50 °C ; Storage Temp.:20~60 °C	Working Temp.:0~ 50 °C ; Storage Temp.:20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	11 ~ 80%

### CERTIFICATION AND COMPATIBILITY

Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1	EN60950-2
EMC	Class A	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

### OPTIONAL ACCESSORIES

Touch Overlay, Protection Glass Overlay, Protection Glare Overlay, Logo Overlay

### OTHER

Included in Pocket | Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)



unisigns



unisigns



unisigns



unisign

[www.unisign.com.tr](http://www.unisign.com.tr)

[info@unisign.com.tr](mailto:info@unisign.com.tr)



**STRETCHED**

