



UHD STANDALONE

Sign Series

Create impressive space for all target audience

Outdoor/Indoor



Capture the most realistic images with Unsign Ultra HD displays!

Today's businesses, including banks, restaurants, retailers and more, are increasingly using digital signage to engage, educate and serve their customers. With the latest Ultra HD technology, businesses can leverage the next generation of ultimate picture quality for conveying more impactful messaging and information.



UHD offers ultra-realistic detail, the ability to display more information on one screen, and four times the detail clarity, which is most evident when displaying text.

With stunning UHD quality delivers an all-in-one digital signage solution with exceptional stopping power and smart features. Built to run around the clock, you can deliver your message 24/7 and even personalize it in real time with application-based management technology.

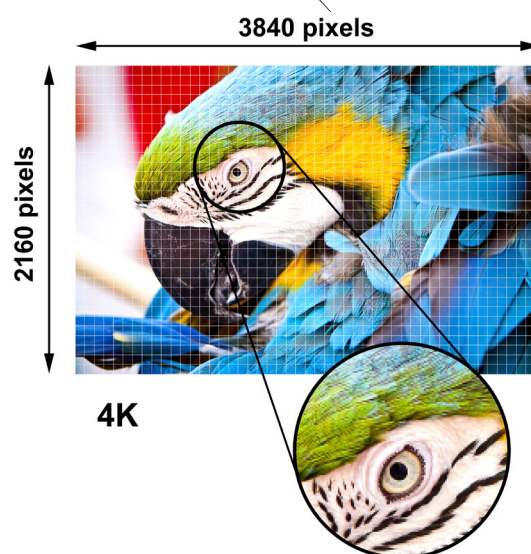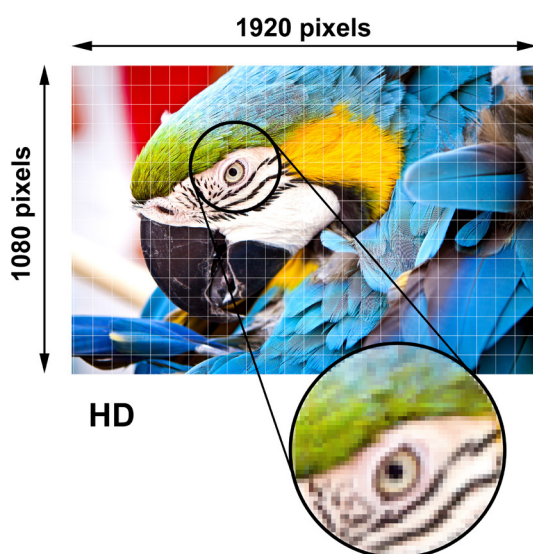

Unisign Ultra HD displays has 500nits panel that helps to ensure clear visibility of your content.

PANEL	SU490MQ	SU550MQ	SU650MQ	SU750MQ
Panel Size	49"	55"	65"	75"
Panel Type	60Hz ELED, (a-Si TFT-LCD , LCM)	60Hz ELED, (a-Si TFT-LCD , LCM)	60Hz ELED, (a-Si TFT-LCD , LCM)	60Hz ELED, (a-Si TFT-LCD , LCM)
Resolution	3840(RGBW) x 2160 [UHD]	3840(RGBW) x 2160 [UHD]	3840(RGBW) x 2160 [UHD]	3840(RGBW) x 2160 [UHD]
Active Display Area (mm)	1073.78(H) x 604.00(V) mm	1209.6(H) x 680.40(V) mm	1428.48(H) x 803.52(V) mm	1649.66(H) x 927.94(V) mm
Brightness (Typ.)	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²
Contrast	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)
Viewing Angle (H x V)	178° x 178°	178° x 178°	178° x 178°	178° x 178°
Response Time (G-to-G)	8 ms	8 ms	8 ms	8 ms
Screen Colors	1.07 Billion	1.07 Billion	1.07 Billion	1.07 Billion
Applications	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical

CONNECTIVITY

Video Input	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2
Video Output	N/A	N/A	N/A	N/A
Audio Input / Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
External Control	RS232, (IR opt.)	RS232, (IR opt.)	RS232, (IR opt.)	RS232, (IR opt.)
External Sensor (optional)	Not Available	Not Available	Not Available	Not Available

POWER

Power Type	Internal	Internal	Internal	Internal
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	165W	190W	265W	315W
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W

DIMENSIONS

Display size(mm)	1092.6 x 624.8 x 29.9	1228.4 x 701.2 x 29.9	1467.4 x 848.0 x 55.9	1676.2 x 959.5 x 57.7
Vesa Mount	400 x 400 mm	400 x 400 mm	400 x 400 mm	400 x 400 mm
Package Size (mm)	1195 x 721 x 167	1335 x 812 x 182	1600 x 980 x 287	1810 x 1085 x 250
Screen Weight (kg)	15	18	32	40
Package Weight (kg)	25	31	34	64

OPERATION

Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY

Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES

Touch - SAW, IR, PCAP ; Protection - Mirror, Glass, Frame ; Apparatus - Built in, Open Frame, Wall, Ceiling	
---	--

OTHER

Included in Pocket	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)
--------------------	---

PANEL	SU860EQ	SU860MQ	SU980MQ
Panel Size	86"	86"	98"
Panel Type	60Hz ELED, (a-Si TFT-LCD , LCM)	60Hz ELED, (a-Si TFT-LCD , LCM)	60Hz ELED, (a-Si TFT-LCD , LCM)
Resolution	3840(RGBW) x 2160 [UHD]	3840(RGBW) x 2160 [UHD]	3840(RGBW) x 2160 [UHD]
Active Display Area (mm)	1895.04(H) x 1065.96(V) mm	1895.04(H) x 1065.96(V) mm	2158.85(H) x 1214.35(V) mm
Brightness (Typ.)	350 cd/m ²	500 cd/m ²	500 cd/m ²
Contrast	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)
Viewing Angle (H x V)	178° x 178°	178° x 178°	178° x 178°
Response Time (G-to-G)	8 ms	8 ms	8 ms
Frame Design	1.07 Billion	1.07 Billion	1.07 Billion
Applications	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical

CONNECTIVITY			
Video Input	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2	HDMI-1, HDMI-2, HDMI-3, DVI, DP-1, DP2
Video Output	N/A	N/A	N/A
Audio Input / Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
External Control	RS232, (IR opt.)	RS232, (IR opt.)	RS232, (IR opt.)
External Sensor (optional)	Not Available	Not Available	Not Available

POWER			
Power Type	Internal	Internal	Internal
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	460W	400W	580W
Standby Mode	<0,5W	<0,5W	<0,5W

DIMENSIONS			
Display size(mm)	1903.4 x 1090.5 x 105.1	1903.4 x 1090.5 x 105.1	2194.2 x 1249.8 x 71.3
Vesa Mount	400 x 400 mm	400 x 400 mm	400 x 400 mm
Package Size (mm)	2050 x 1265 x 472	2050 x 1265 x 472	2455 x 1483 x 605
Screen Weight (kg)	55	55	55
Package Weight (kg)	84	84	84

OPERATION			
Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY			
Safety	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES	
Touch - SAW, IR, PCAP ; Protection - Mirror, Glass, Frame ; Apparatus - Built in, Open Frame, Wall, Ceiling	

OTHER	
Included in Pocket	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)



unisigns



unisigns



unisigns



unisign

www.unisign.com.tr

info@unisign.com.tr



UHD STANDALONE

Sign Series